


SSRMAN Series



SSR Manual Power Control Module

- Extremely Low Cost Power Control Module
- Installs in Minutes
- Mounts on SSR Connection Terminals
- Drives Multiple SSRs
- Input Wiring for Power Control and Power Limit
- On-Board & External Potentiometer Versions
- Optically Isolated SSR Drive
- Limited Two Year Warranty

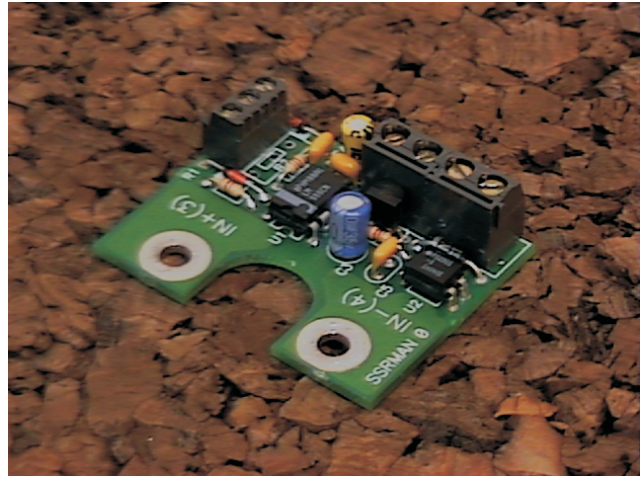

SPECIFICATIONS

Control Output	Provides 0-100% time proportioning (~1-99%) via on board or external potentiometer.
Cycle Time	Approximately 1 second +/- 20%.
Output Linearity	+/- 4%.
External Potentiometer Res.	100K Ω
Power Supply	8-32 VDC, less than 0.5 Watts power consumption.
Control Input Voltage	3-32 VDC or Power Supply voltage, wiring dependent.
SSR Drive Output	Optically Isolated from power supply. Up to 50mA, based on voltage at control input.

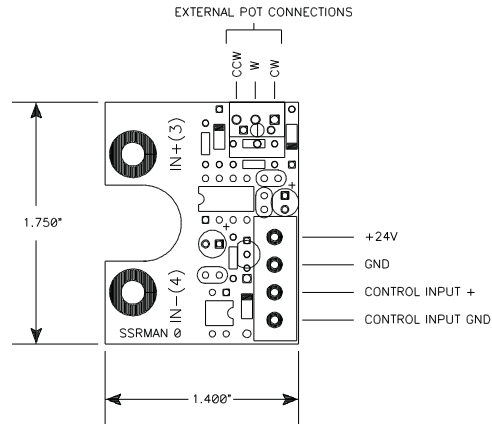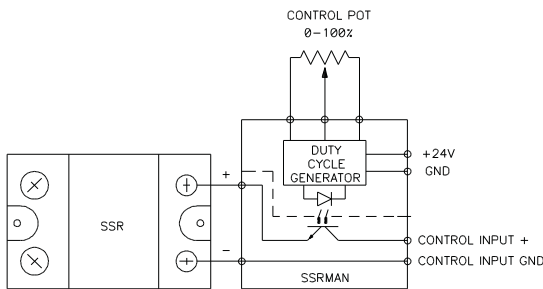

ORDERING INFORMATION

SSRMAN

- -

Potentiometer

E: External
EC: External, Cust. Supplied
B: On-Board Trimmer Pot

- -

Knob & Scale

KS: Knob and 0-100% Scale Included
S: Only 0-100% Scale Included
Leave Blank: No Knob/Scale Included

- -

Pot Wire Length

12: (12")
24: (24")
48: (48")
Leave Blank: No Wire